UFL850

API 682 4th Edition Category 2 & 3 Seal type B (Rotating) Configuration 1CW-FL (Contacting Wet – Floating throttle bushing)

Product Description

- 1. API 682 Category 2 and 3, Type B, Arrangement 1 seal
- 2. Single seal configuration
- 3. Balanced design
- 4. Independent of direction of rotation
- 5. Cartridge Construction
- 6. For plain shafts
- 7. Rotary metal bellows design
- 8. Shrink fitted seal ring and solid stationary ring

Technical Features

- 1. Compact design construction
- 2. Balanced bellows design allows installation on plain sleeve
- Elimination of seal face hang up due to absence of dynamic O-Ring
- 4. Face load variation is minimised due to bellows design on account of shaft expansion or face wear
- 5. Resistance to abrasive particles in the medium, no shaft or sleeve fretting
- 6. Narrow seal face width leads to low heat generation and power consumption
- 7. Extended seal life

Typical Industrial Applications

- API 610/ISO 13709 pumps
- · Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- · Power plant technology
- LPG plants
- Process pumps

Performance Capabilities

Shaft diameter: d1 = 20 ... 110 mm (0.79" ... 4.33") Pressure: p = vacuum ... 20 bar (290 PSI) Temperature: t = -40 °C ... +200 °C (-40 °F ... +392 °F) Sliding velocity: vg ... 23 m/s (75 ft/s)

Materials

Seal ring: Blister resistant carbon

Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)

Bellows: Hastelloy® C-276 (M5), option: Inconel® 718 (M6)


Secondary seals: EPDM (E), NBR (P), FKM (V), FFKM (K) Metal parts: CrNiMo steel 316 (G), Hastelloy® C-276

(M5)

Recommended piping plans

Process side:

01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B

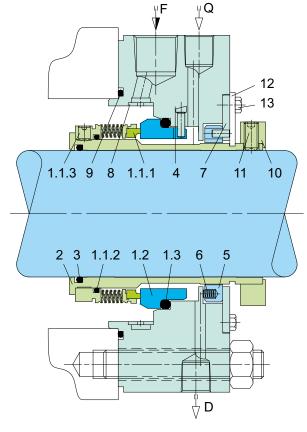

Item	Description
1.1.1	Seal Ring with Bellows Unit
1.1.2, 1.3, 3, 9	O-ring
1.1.3, 11	Set screw
1.2	Mating ring
2	Shaft sleeve
4	Gland
5	Throttle bushing
6	Spring
7	Washer
8	Multi-flow distributor
10	Set ring
12	Setting plate
13	Hexagon bolt
F	Flush
Q	Quench
D	Drain

